



OMNI-DIRECTIONAL SOLUTIONS

9135 OMNITRACK HIGH CAPACITY BALL TRANSFER UNIT


REVISION # 01

Removable & reusable 'Spirolox'
circling allows cleaning/user servicing

Available Material Options			
Part #	Load Bearing Internal Materials	Ball Material	Casing Material & Finish
9135	AISI 52100	AISI 52100	AISI 1012 ZINC/ELECTROPHORETIC (BLACK)
9135 A	AISI 52100	AISI 440	AISI 1012 ZINC/ELECTROPHORETIC (BLACK)
9135 Z	AISI 440	AISI 440	AISI 1012 ELECTROPHORETIC (BLACK)
9135 SS	AISI 440	AISI 440	AISI 304 - NATURAL
9135 PB	PHENOLIC RESIN MAIN BALL OPTION AVAILABLE FOR ALL MATERIAL OPTIONS - 30 Kg		

~ Operating temperature -20° C + 125° C (continuous)

LOAD CAPACITY 375kg

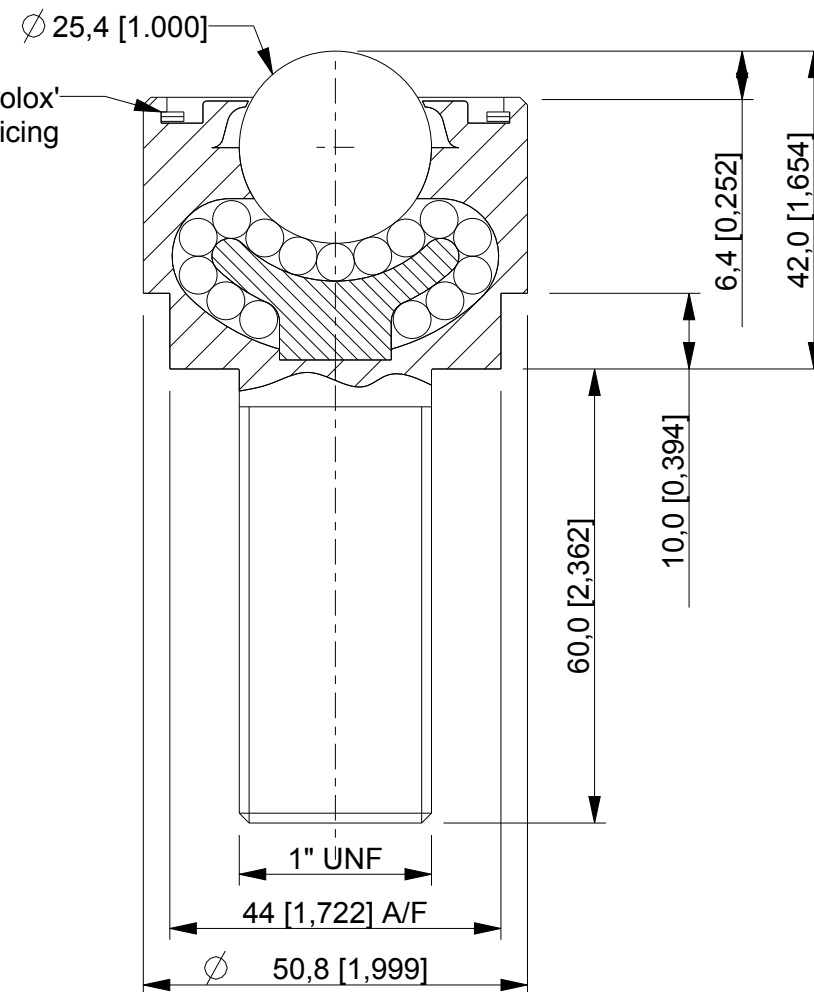

ALL DIMENSIONS IN mm [inch]
IF VIEWED AS PDF, DO NOT SCALE
IF VIEWED AS DWG, SCALE 1 : 1
TOLERANCE $\pm 0,25$
QMF 31 ISSUE 01 : 22/06/2012

OMNITRACK LTD
RODBOROUGH COURT
STROUD, GL5 3LR, ENGLAND

Telephone: +44 (0)1453 873 345
Fax: +44 (0)1453 878 500
info @ omnitrack.com
www.omnitrack.com

THIS DOCUMENT CONTAINS OMNITRACK LTD
PROPERTY AND CONFIDENTIAL INFORMATION.
IT IS LOANED FOR LIMITED PURPOSES ONLY
AND REMAINS THE PROPERTY OF OMNITRACK
LTD. IT MAY NOT BE REPRODUCED IN WHOLE
OR PART OR DISCLOSED TO THIRD PARTIES
WITHOUT THE PRIOR WRITTEN CONSENT OF
OMNITRACK LTD. THE DOCUMENT IS TO BE
RETURNED TO OMNITRACK LTD UPON REQUEST
AND IN ALL EVENTS UPON COMPLETION OF THE
USE FOR WHICH IT WAS LOANED