



OMNI-DIRECTIONAL SOLUTIONS

# 9143 OMNITRACK HIGH CAPACITY BALL TRANSFER UNIT

REVISION # 01


Removable & reusable 'Spirolox'  
circling allows cleaning/user servicing

Available Material Options			
Part #	Load Bearing Internal Materials	Ball Material	Casing Material & Finish
9143	AISI 52100	AISI 52100	AISI 1012 ZINC/ELECTROPHORETIC (BLACK)
9143 A	AISI 52100	AISI 440	AISI 1012 ZINC/ELECTROPHORETIC (BLACK)
9143 Z	AISI 440	AISI 440	AISI 1012 ELECTROPHORETIC (BLACK)
9143 SS	AISI 440	AISI 440	AISI 304 - NATURAL
9143 PB	PHENOLIC RESIN MAIN BALL OPTION AVAILABLE FOR ALL MATERIAL OPTIONS - 35 Kg		

~ Operating temperature -20° C + 125° C (continuous)

**LOAD CAPACITY 1100kg**

Ø 38,1 [1,500]

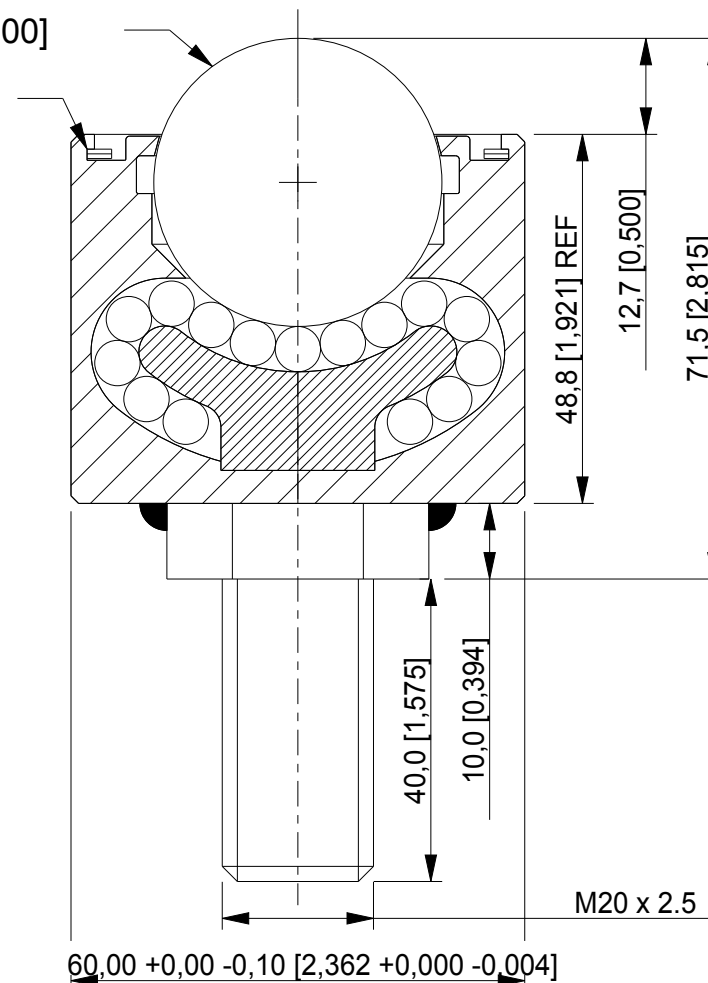

**OMNITRACK LTD**  
RODBOROUGH COURT  
STROUD, GL5 3LR, ENGLAND

Telephone: +44 (0)1453 873 345  
Fax: +44 (0)1453 878 500  
info @ omnitrack.com  
www.omnitrack.com

THIS DOCUMENT CONTAINS OMNITRACK LTD PROPERTY AND CONFIDENTIAL INFORMATION. IT IS LOANED FOR LIMITED PURPOSES ONLY AND REMAINS THE PROPERTY OF OMNITRACK LTD. IT MAY NOT BE REPRODUCED IN WHOLE OR PART OR DISCLOSED TO THIRD PARTIES WITHOUT THE PRIOR WRITTEN CONSENT OF OMNITRACK LTD. THE DOCUMENT IS TO BE RETURNED TO OMNITRACK LTD UPON REQUEST AND IN ALL EVENTS UPON COMPLETION OF THE USE FOR WHICH IT WAS LOANED

ALL DIMENSIONS IN mm [ inch ]  
IF VIEWED AS PDF, DO NOT SCALE  
IF VIEWED AS DWG, SCALE 1 : 1  
TOLERANCE ± 0,25  
QMF 31 ISSUE 01 : 22/06/2012