


B25 OMNITRACK HIGH CAPACITY SPRING LOADED BALL TRANSFER BAR


REVISION # 01

Available Material Options			
Part #	Load Bearing Internal Materials	Ball Material	Casing Material & Finish
B25	AISI 52100	AISI 52100	AISI 1012 ZINC/ELECTROPHORETIC (BLACK)

BAR SUPPORTS A LOAD OF 305 Kg / 671 Lbs LOAD AT MAX DEFLECTION 484 Kg / 1065 Lbs

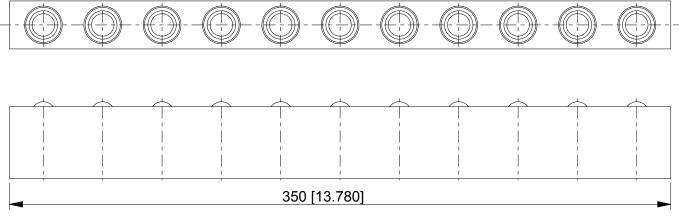

OTHER SIZES AVAILABLE - CONTACT TECHNICAL SUPPORT FOR CUSTOM MADE BALL TRANSFER BARS

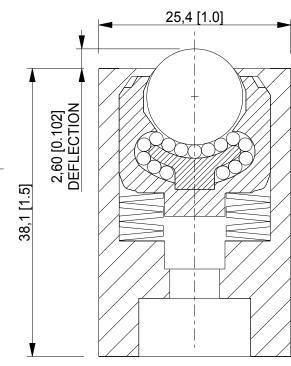

SECTION THROUGH INTERNAL BALL UNIT SCALE 2:1

ALL DIMENSIONS IN mm [inch]
IF VIEWED AS PDF, DO NOT SCALE
IF VIEWED AS DWG, SCALE 1 : 2
TOLERANCE ± 0,25
QMF 31 ISSUE 01 : 22/06/2012

OMNITRACK RODBOROUGH COURT STROUD, GL5 3LR, ENGLAND Telephone: +44 (O)1453 873 345 Fax: +44 (O)1453 878 500 info @ omnitrack.com

www.omnitrack.com

THIS DOCUMENT CONTAINS OMNITRACK PROPERTY AND CONFIDENTIAL INFORMATION. IT IS LOANED FOR LIMITED PURPOSES ONLY AND REMAINS THE PROPERTY OF OMNITRACK. IT MAY NOT BE REPRODUCED IN WHOLE OR PART OR DISCLOSED TO THIRD PARTIES WITHOUT THE PRIOR WRITTHA CONSENT OF OMNITRACK. THE DOCUMENT IS TO BE RETURNED TO OMNITRACK UPON REQUEST AND IN ALL EVENTS UPON COMPLETION OF THE USE FOR WHICH IT WAS LOANED