omnidirectional movement

25

REVISION # 01

ALL DIMENSIONS IN mm [inch]

IF VIEWED AS DWG, SCALE x : x

OMF 31 ISSUE 02 : 09/01/2017

IF VIEWED AS PDF, DO NOT SCALE

TOLERANCE ± 0,25 [0.01]





Telephone: +44 (O)1453 873 345


Fax: +44 (O)1453 878 500

info @ omnitrack.com

www.omnitrack.com

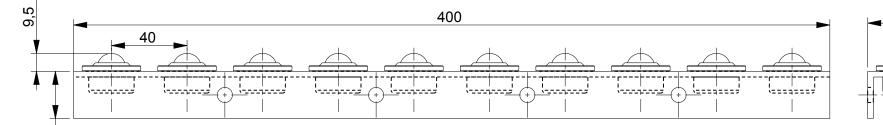






Material Options			
Part Number	Bar Material	Ball Material	Load Rating
R15-400	AISI 1012 Electrophoretic (Black)	AISI 52100	600 kg / 1300 lbs
R15-400A	AISI 1012 Electrophoretic (Black)	AISI 420	600 kg / 1300 lbs
R15-400D	AISI 1012 Electrophoretic (Black)	Acetal (POM)	100 kg / 220 lbs
R15-400SS	AISI 304 - Natural	AISI 420	400 kg / 900 lbs

OMNITRACK

RODBOROUGH COURT


STROUD, GL5 3LR, ENGLAND



40

10mm HOLE
2,5mm FROM BASE

FIXING BRACKET - RB1 OPTIONAL 50x25mm BRACKET MADE FROM 3mm THICK ANGLE



THIS DOCUMENT CONTAINS OMNITRACK PROPERTY AND CONFIDENTIAL INFORMATION. IT IS LOANED FOR LIMITED PURPOSES ONLY AND REMAINS THE PROPERTY OF OMNITRACK. IT MAY NOT BE REPRODUCED IN WHOLE OR PART OR DISCLOSED TO THIRD PARTIES WITHOUT THE PRIOR WRITTEN CONSENT OF OMNITRACK. THE DOCUMENT IS TO BE RETURNED TO OMNITRACK UPON REQUEST AND IN ALL EVENTS UPON COMPLETION OF THE USE FOR WHICH IT WAS LOANED